

PRODUCT:

QUANTITY:

ITEM #:

### Designed Smart

#### Increased Performance in Cooking

- Unique Heating system, incorporating special heating elements that transfer heat energy to griddle surface more efficiently than traditional models.
- Fast startup to cooking temperatures (reaches 350 degrees in 11 minutes).
- Provides fast recovery with heat levels reaching 450 degrees.

#### Safety Features

- New bull-nose front extension protects employees from burns.

### Built Solid

#### Built to Last!

- Thick, stainless steel construction on front panel and top skirt
- 3/4 inch polished steel griddle surface stands up to years of high output cooking.
- Griddle plate is fully welded to base.
- Welded construction in frame base.

#### Reliability backed by APW Wyott's Warranty

- APW Wyott cooking equipment is backed by a 3-year limited warranty, and a 1-year on-site labor warranty.
- Certified by the following agencies:



Countertop Electric Griddle

### APW Wyott Design Features

- Stainless steel construction.
- 4" (10 cm) adjustable legs.
- 12" cooking section for zone control.
- 3/4" flat polished steel griddle plate.
- 3 3/16" spatula-width stainless steel front grease trough.
- 4" x 1" grease chute.
- 4 gallon grease collection drawer.
- 3" stainless steel backsplash.
- Sloped stainless steel side splash.
- Easy-to-read control knobs.

See reverse side for product specifications.




APW Wyott Foodservice Equipment Company · 729 Third Ave., Dallas, TX 75226  
(800) 527-2100 · (214) 421-7366 · Fax (214) 565-0976 · [www.apwwyott.com](http://www.apwwyott.com) · [info@apwwyott.com](mailto:info@apwwyott.com)

5/22/2005

PRODUCT:

QUANTITY:

ITEM #:

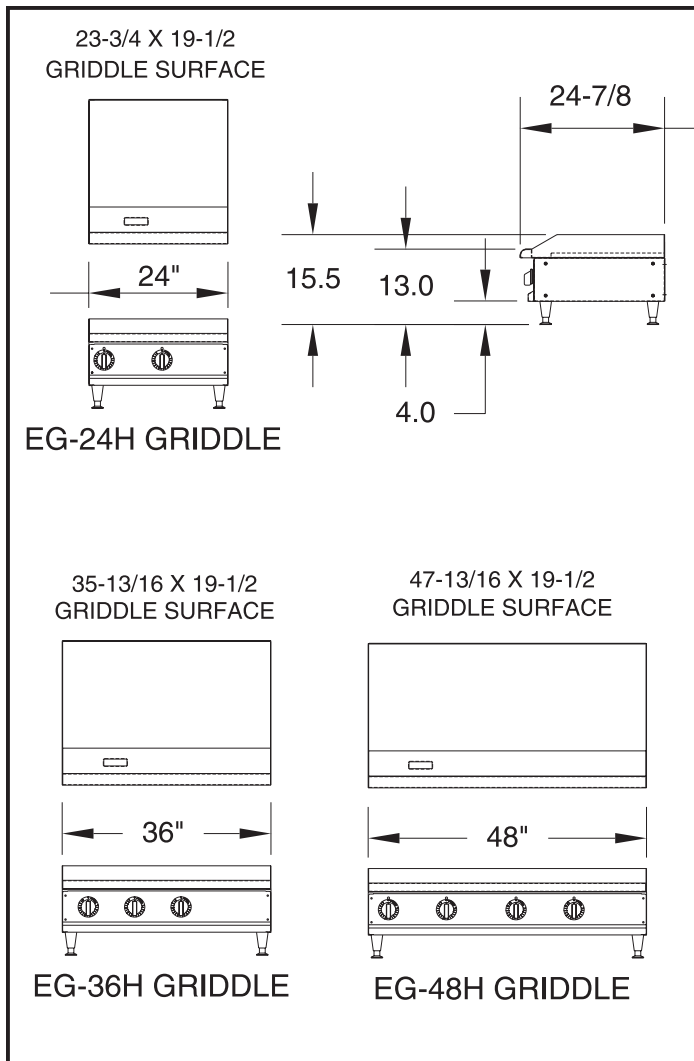

Countertop Electric Griddle

## PRODUCT SPECIFICATIONS

### Construction:

Heavy-duty stainless steel front and top skirt with aluminized steel sides and back. Welded construction. Cold rolled steel fire box. 3/4" polished steel griddle plate. 4" adjustable legs.

### Electrical Specifications:

EG-24H: 208V, 6.75 KW, 32.5 Amps  
230V, 8.2 KW, 35.9 Amps  
240V, 9 KW, 37.5 Amps

EG-36H: 208V, 10 KW, 48.7 Amps  
230V, 12.4 KW, 53.9 Amps  
240V, 13.5 KW, 56.3 Amps

EG-48H: 208V, 13.5 KW, 65 Amps  
230V, 16.5 KW, 71.9 Amps  
240V, 18 KW, 75 Amps

Terminal block located on right side of unit.

### Overall Dimensions:

EG-24H: 15 1/2" H x 24" W x 24 7/8" D  
(39.2 cm x 61 cm x 62.4 cm)

EG-36H: 15 1/2" H x 36" W x 24 7/8" D  
(39.2 cm x 91.4 cm x 62.4 cm)

EG-48H: 15 1/2" H x 48" W x 24 7/8" D  
(39.2 cm x 122 cm x 62.4 cm)

### Shipping:

EG-24H: 180 lbs. (81.8 kg)  
EG-36H: 252 lbs. (114.5 kg)  
EG-48H: 342 lbs. (155.4 kg)

Freight Class: 100  
FOB: Cheyenne, WY

\*APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation.